DRIVER

DR-DG-20-MO

20 Gbps NRZ/RZ High Performance Driver Module

The DR-DG-20-MO is a high performance versatile driver module designed for 2.5 Gbps up to 20 Gbps data transmission with NRZ or RZ format. It exhibits a 28 dB gain and can deliver an output signal up to 9 V_{pp}.

The DR-DG-20-MO is a key component to obtain high quality 2.5 Gbps up to 20 Gbps eye diagrams with low rise and fall time, low jitter and high SNR. It operates from a single power supply for safety and ease of use, and offers gain and cross point controls. It comes with K type RF connectors (female in, male out) and with an optional heat-sink.



Features

- Output voltage up to 8 V_{pp}
- Low Rise / Fall time
- Flat gain up to 20 GHz
- Single voltage power supply
- Low group delay variation

Applications

- $LiNbO_3$ modulators
- 20 Gbps NRZ and RZ
- Research & Development

Options


- Heat-sink

Performance Highlights

Parameter	Min	Typ	Max	Unit
Cut-off frequencies	50 k	-	18 G	Hz
Output voltage	2	-	8	V_{pp}
Gain	28	30	-	dB
Saturate output power	-	-	23	dBm
Added jitter	-	0.9	-	fs
Rise / Fall times	-	14	-	ps

Measurements for V_{bias} = 12 V, V_{amp} = 0.65 V, V_{xp} = 1 V, I_{bias} = 319 mA

20 Gbps Output Response

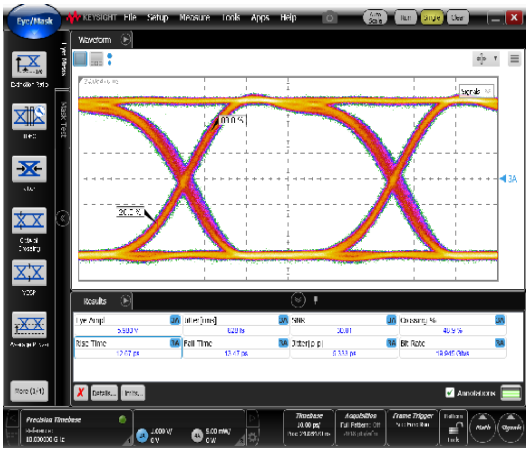

Sales: contact@cybel-llc.com | Web: www.cybel-llc.com | 62 Highland Ave., Bethlehem, PA 18017, USA | Tel: +1 (610) 691-7012

DR-DG-20-MO

20 Gbps NRZ/RZ High Performance Driver Module

DC Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage (fixed)	V_{bias}	-	12	-	V
Current consumption	I_{bias}	-	260	-	mA
Gain control voltage	V_{amp}	-	0.5	-	V
Cross Point control voltage	V_{xp}	-	0.9	-	V

Electrical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Lower frequency	f_{3db}, lower	-3 dB point	-	-	50	kHz
Upper frequency	f_{3db}, upper	-3 dB point	18	20	-	GHz
Gain	S_{21}	Small signal	28	30	-	dB
Gain ripple	-	f < 15 GHz	-	± 1.5	-	dB
Input return loss	S_{11}	10 MHz < f < 12 GHz	-	-10	-	dB
Output return loss	S_{22}	10 MHz < f < 15 GHz	-	-10	-	dB
Saturated ouptut power	P_{sat}	V_{in} = 0.5 V_{pp}	22	23	-	dBm
Output voltage	V_{out}	V_{in} = 0.5 V_{pp}	2	-	8	V_{pp}
Rise / Fall time	t_r / t_f	20 % - 80 %	-	12 / 16	-	ps
Added Jitter	J_{RMS}	$J_{RMS} = \sqrt{J^2_{RMS\text{-}total} - J^2_{RMS\text{-}source}}$	-	0.9	-	ps
Noise figure	NF	1 GHz < f < 20 GHz	3.5	-	6	dB
Power dissipation	P	V_{out} = 8 V_{pp}	-	3.2	-	W

Conditions: V_{in} = 0.5 V_{pp}, T_{amb} = 25 °C, 50 W system

Absolute Maximum Ratings


Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
RF input voltage	V_{in}	-	1	V_{pp}
Supply voltage	V_{bias}	11	13	V
DC current	I_{bias}	0	0.4	A
Gain control voltage	V_{amp}	0	1.2	V
Cross Point control voltage	V_{xp}	0	1.1	V_{pp}
Power dissipation	P_{diss}	-	5.2	W
Operating temperature	T_{op}	0	+40	°C
Storage temperature	T_{st}	-20	+70	°C

DR-DG-20-MO


S_{21} and Group Delay Parameter Curves

Conditions: V_{bias} = 12 V, V_{amp} = 0.65 V, V_{xp} =1 V, I_{bias} = 319 mA

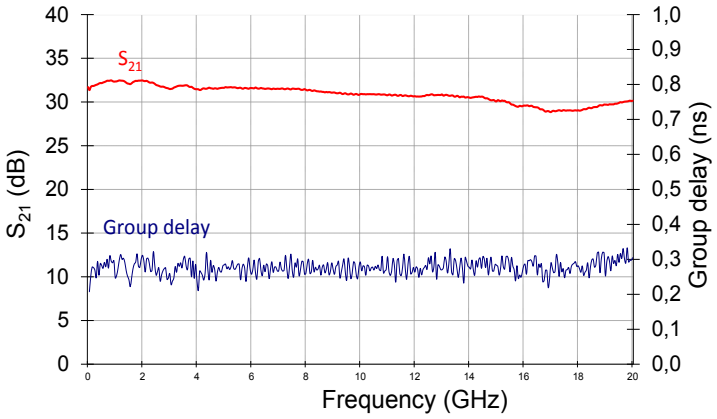


S_{12} Parameter Curve

Conditions: V_{bias} = 12 V, V_{amp} = 0.65 V, V_xp = 1 V, I_{bias} = 319 mA

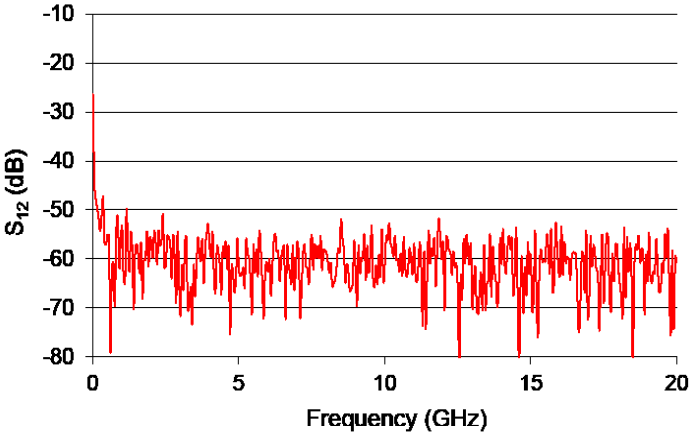


S_{22} Parameter Curve

Conditions: V_{bias} = 12 V, V_{amp} = 0.65 V, V_{xp} =1 V, I_{bias} = 319 mA

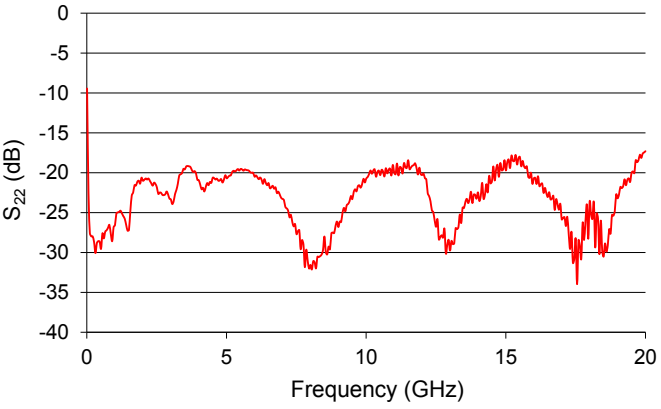


S_{11} Parameter Curve

Conditions: V_{bias} = 12 V, V_{amp} = 0.65 V, V_{xp} =1 V, I_{bias} = 319 mA

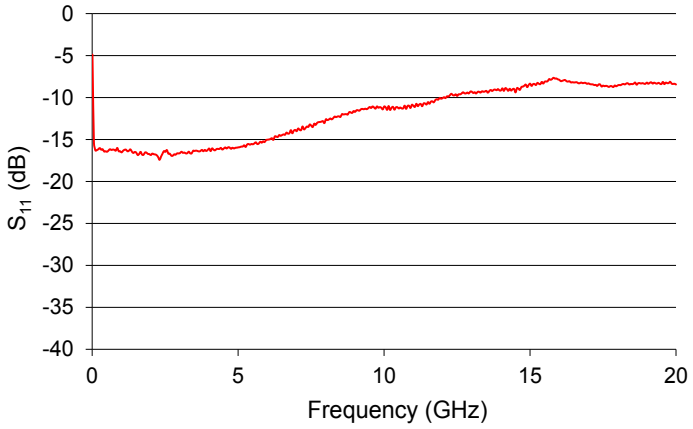


Typical Output Voltage Amplitude vs V_{amp}

Conditions: V_{bias} = 12 V, V_{in} = 0.5 V

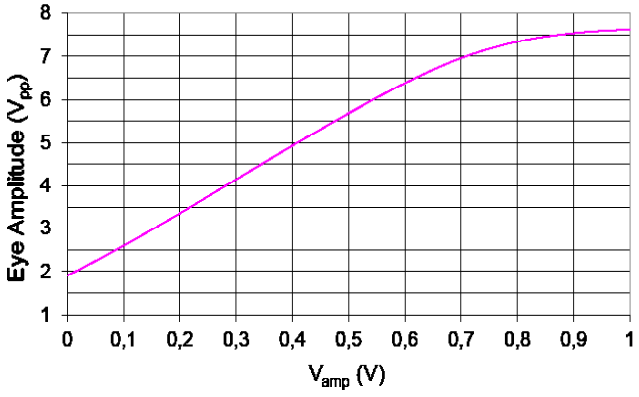

Typical Cross point vs V_{xp}

Conditions: V_{bias} = 12 V, V_{in} = 0.5 V

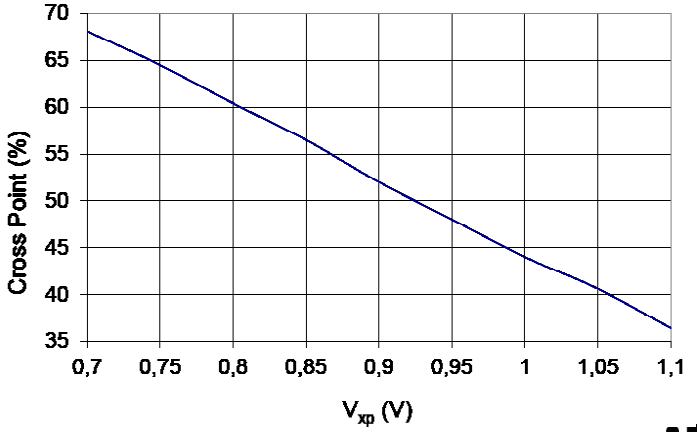


DR-DG-20-MO

Eye Diagrams

12.5 Gbps data rate


Conditions: Ratio 1/2, Pattern 2^{31}-1

V_{bias} = 12 V, V_{amp} = 0.75 V, V_{xp} = 0.88 V, I_{bias} = 277 mA

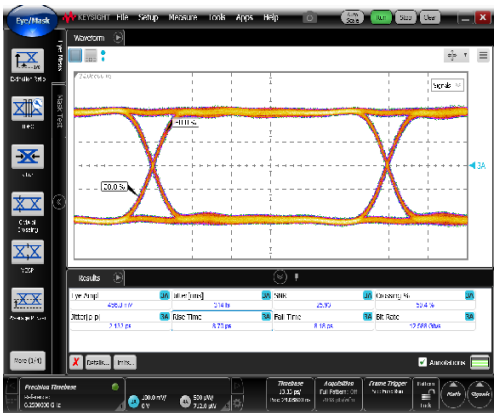

Input signal

Eye amplitude = 0.45 V_{pp}

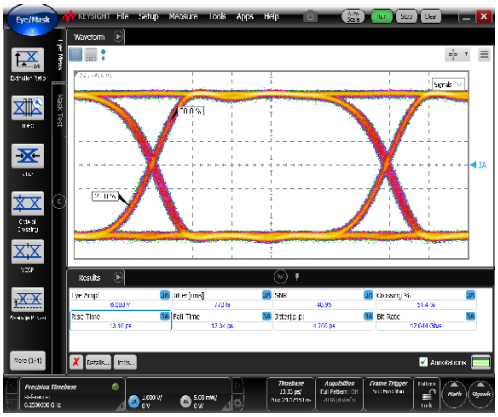


Output response

Eye amplitude = 6 V_{pp}

20 Gbps data rate


Conditions: Ratio 1/2, Pattern 231-1

V_{bias} = 12 V, V_{amp} = 0.65 V, V_{xp} = 1 V, I_{bias} = 319 mA

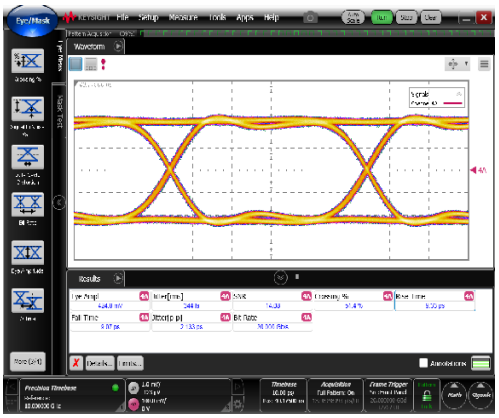

Input signal


Eye amplitude = 0.43 V_{pp}

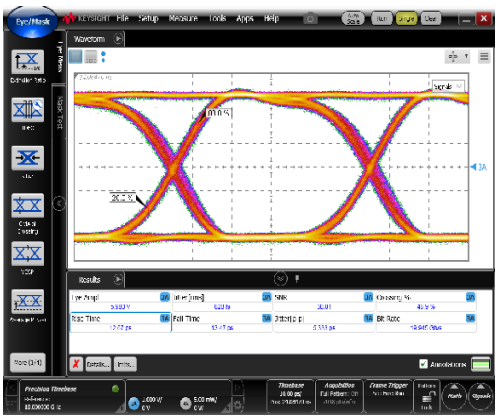

Output response


Eye amplitude = 6 V_{pp}

Electrical Schematic Diagram

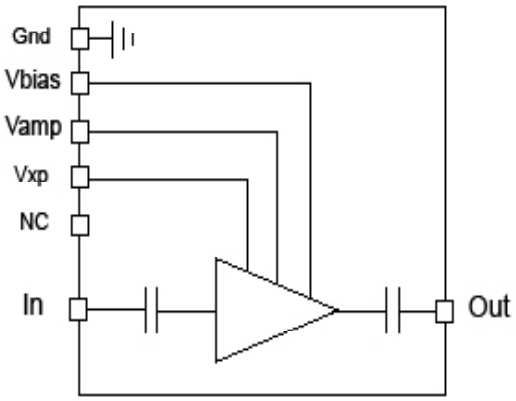

Mechanical Diagram and Pinout

All measurements in mm

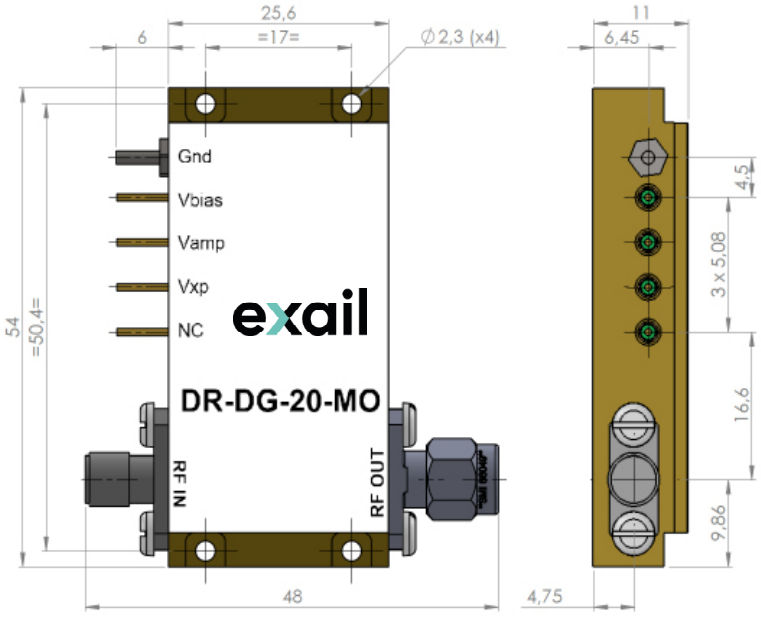



The heat-sinking of the module is necessary. It's user responsability to use an adequate heat-sink. Refer to page 6 for Exail recommended heat-sink.

Port	Function	Unit
IN	RF In	Female K connector
OUT	RF Out	Male K connector
V_{bias}	Power supply voltage	Set a typical operating specification
V_{amp}	Output voltage amplitude adjustment	Adjust for gain control tuning
V_{amp}	Output voltage cross point adjustment	Adjust for cross point control tuning

Mechanical Diagram and Pinout with HS-MO2 Heat-sink

All measurements in mm



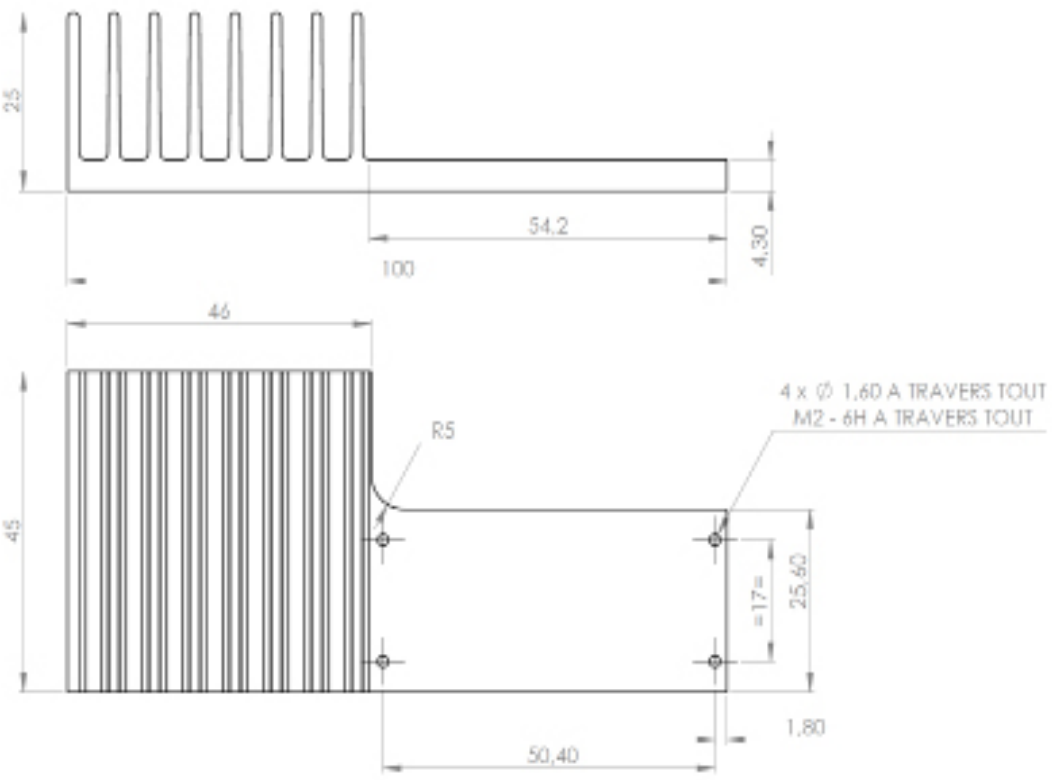

About us

Sales: contact@cybel-llc.com | Web: www.cybel-llc.com | 62 Highland Ave., Bethlehem, PA 18017, USA | Tel: +1 (610) 691-7012