DRIVER

DR-DG-20-HO

22 Gbps High Output Voltage Driver

The DR-DG-20-HO is a driver module optimized for digital applications requiring an upper operation voltage. It exhibits 12.5 Vpp output volatge and 29 dB gain up to 23 GHz.

The DR-DG-20-HO module is especially useful for driving $LiNbO_3$ modulators with 22 Gbps DPSK and 2x20 Gbps (D)QPSK modulation formats. It is operated from a single power supply voltage for safety and ease of use and offers gain and cross-point control.

The DR-DG-20-HO comes with K type RF connectors (female in, male out) and with an optionnal heat-sink. It is a non-inverting and single ended amplifier.



Features

- High output voltage 12.5 V_{pp}
- High gain 29 dB
- Flat gain up to 20 GHz
- Single voltage power supply

Applications

- 22 Gbps DPSK
- 2x20 Gbps (D)QPSK
- Spectrum broadening

Options

- 13.5 V_{pp} output voltage
- Heat-sink
- Analog version

Related Equipments


- MXIQUER-LN-40, MX-LN-20 modulators
- MBC-DG Automatic Bias Controllers

Performance Highlights

Parameter	Min	Typ	Max	Unit
Cut-off frequencies	80 k	23 G	25 G	Hz
Output voltage	-	12.5	13.5	V_{pp}
Gain	-	29	-	dB
Saturated power	26	-	-	dBm
Added jitter	-	1.05	-	ps
Rise / Fall times	-	12 / 16	-	ps

Measurements for V_{bias} = 12 V, V_{amp} = 1.2 V, V_{xp} = 0.7 V, I_{bias} = 550 mA

20 Gbps Output Response

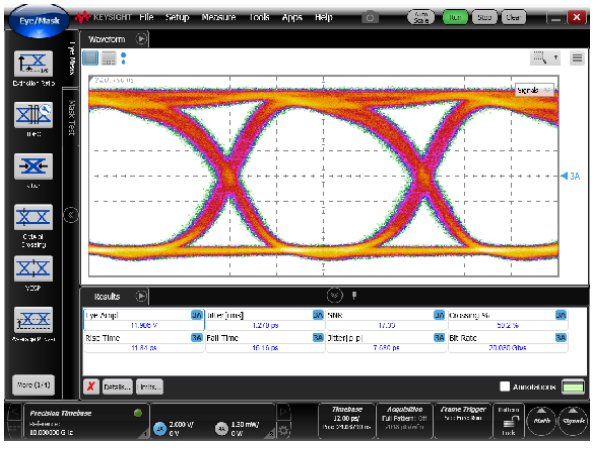

exail

DR-DG-20-HO

22 Gbps High Output Voltage Driver

DC Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage (fixed)	V_{bias}	-	12	13	V
Current consumption	I_{bias}	-	0.53	0.58	A
Gain control voltage	V_{amp}	0	1.5	2	V
Cross Point control voltage	V_{xp}	0	0.7	1	V

Electrical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Lower frequency	f_{3db}, lower	-3 dB point	-	-	80	kHz
Upper frequency	f_{3db}, upper	-3 dB point	-	23	25	GHz
Gain	S_{21}	Small signal	-	29	-	dB
Gain ripple	-	f < 17 GHz	-	± 1.5	-	dB
Input return loss	S_{11}	50 kHz < f < 18 GHz	-	-10	-	dB
Output return loss	S_{22}	50 kHz < f < 15 GHz	-	-10	-	dB
Saturated power	P_{sat}	V_{in} = 0.65 V_{pp}	26	-	-	dBm
Output voltage	V_{out}	V_{in} = 0.65 V_{pp} @ 20 Gbps	-	12.5	13.5 (V_{in} = 0.8 V_{pp})	V_{pp}
Rise / Fall time	t_r / t_f	20 % - 80 %	-	12 / 16	-	ps
Added Jitter	J_{RMS}	$J_{RMS} = \sqrt{J^2_{RMS\text{-}total} - J^2_{RMS\text{-}source}}$	-	1.05	-	ps
Power dissipation	P	V_{out} = 12.5 V_{pp}	-	6.4	-	W

Conditions: V_{in} = 0.65 V_{pp}, T_{amb} = 25 °C, 50 W system

Absolute Maximum Ratings


Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
RF input voltage	V_{in}	-	0.8	V_{pp}
Supply voltage	V_{bias}	-	13	V
DC current	I_{bias}	-	0.58	A
Gain control voltage	V_{amp}	0	2	V
Cross Point control voltage	V_{xp}	0	1	V
Power dissipation	P_{diss}	-	7.3	W
Operating temperature	T_{op}	0	40	°C
Storage temperature	T_{st}	-20	+70	°C

DR-DG-20-HO


S_{21} Parameter Curve

Conditions: V_{bias} = 12 V, V_{amp} = 1.2 V, V_{xp} = 0.7 V, I_{bias} = 550 mA

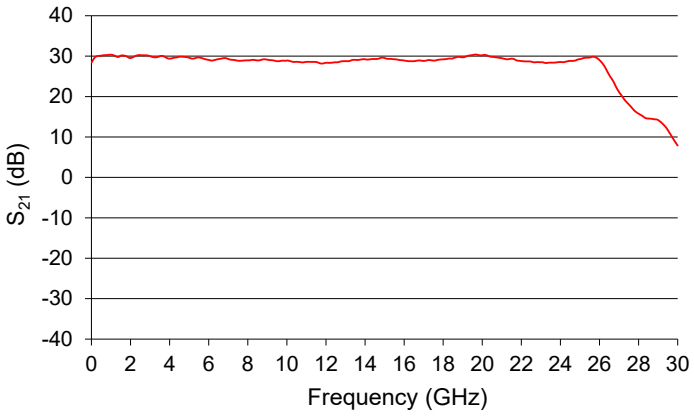


Group Delay Parameter Curve

Conditions: V_{bias} = 12 V, V_{amp} = 1.2 V, V_{xp} = 0.7 V, I_{bias} = 550 mA

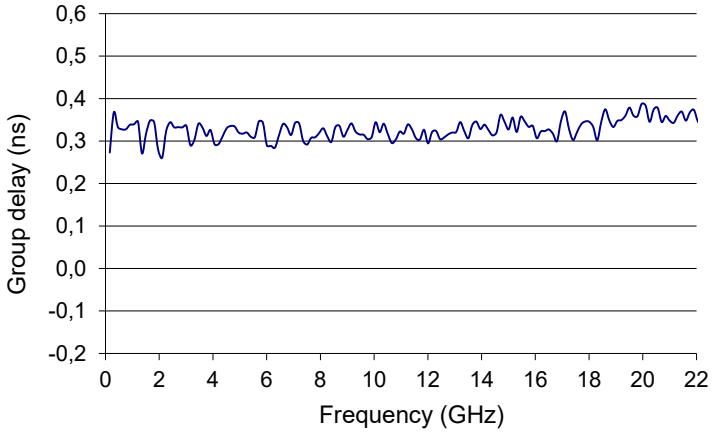


S_{22} Parameter Curve

Conditions: V_{bias} = 12 V, V_{amp} = 1.2 V, V_{xp} = 0.7 V, I_{bias} = 550 mA

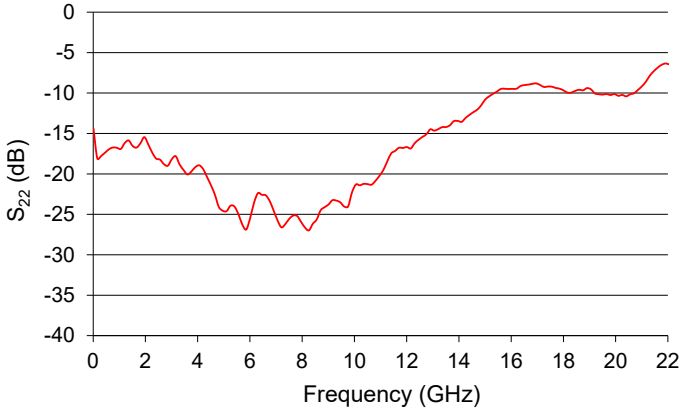


S_{11} Parameter Curve

Conditions: V_{bias} = 12 V, V_{amp} = 1.2 V, V_{xp} = 0.7 V, I_{bias} = 550 mA

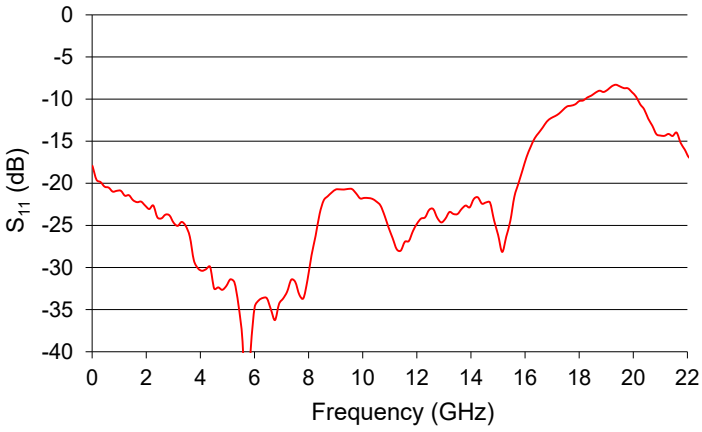


S_{12} Paremeter Curve

Conditions: V_{bias} = 12 V, V_{amp} = 1.2 V, V_{xp} = 0.7 V, I_{bias} = 550 mA

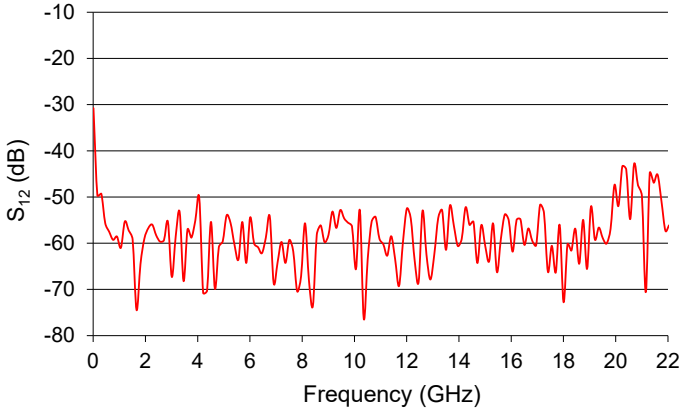

Noise Factor Curve

Conditions: V_{bias} = 12 V, V_{amp} = 1.2 V, V_{xp} = 0.7 V, I_{bias} = 550 mA

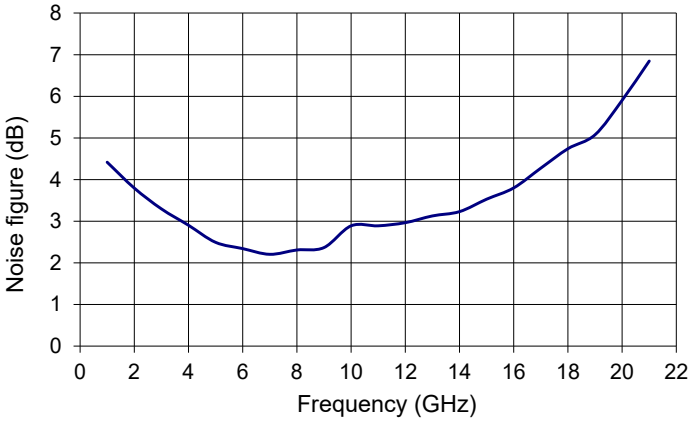


DR-DG-20-HO

Eye Diagrams

10 Gbps data rate


Conditions: Ratio 1/2, Pattern $2^{31}-1$

V_{bias} = 12 V, V_{amp} = 1.4 V, V_{xp} = 0.7 V, I_{bias} = 501 mA

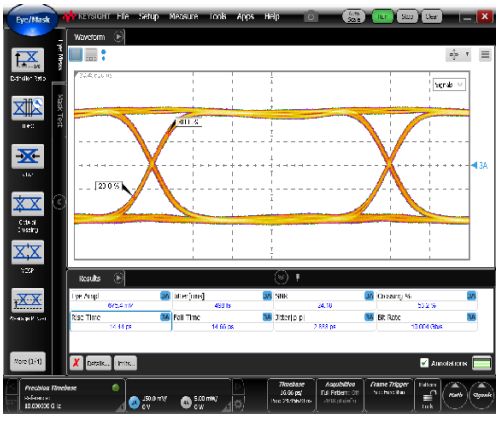

Input signal

Eye amplitude = 0.66 V_{pp}

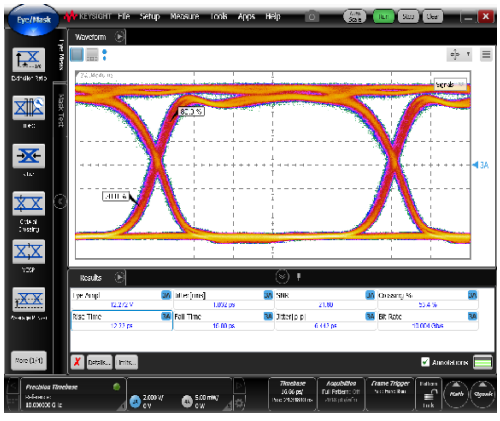


Output response

Eye amplitude = 12.2 V_{pp}

20 Gbps data rate


Conditions: Ratio 1/2, Pattern $2^{31}-1$

V_{bias} = 12 V, V_{amp} = 1.5 V, V_{xp} = 0.8 V, I_{bias} = 575 mA

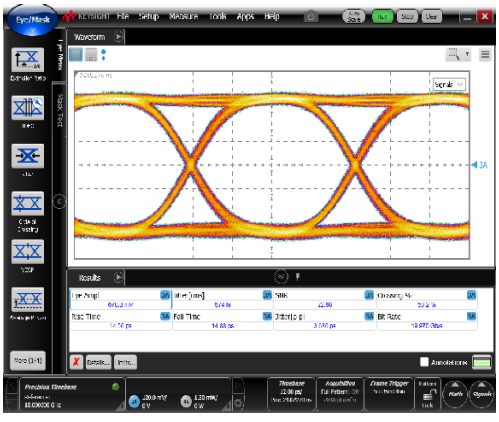

Input signal


Eye amplitude = 0.66 V_{pp}

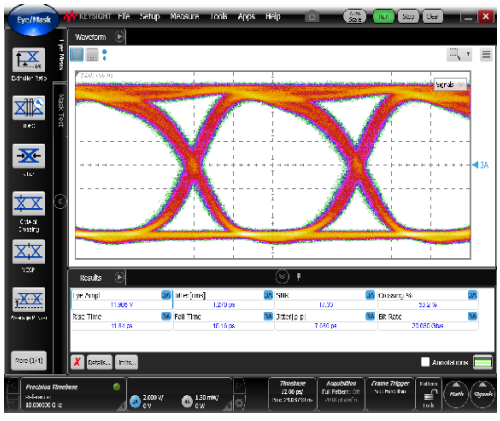

Output response


Eye amplitude = 11.9 V_{pp}

Electrical Schematic Diagram

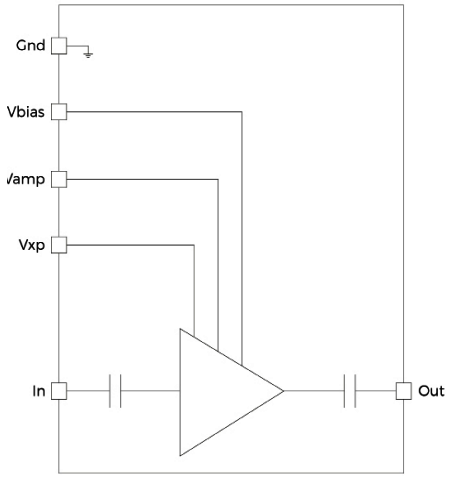

Mechanical Diagram and Pinout

All measurements in mm

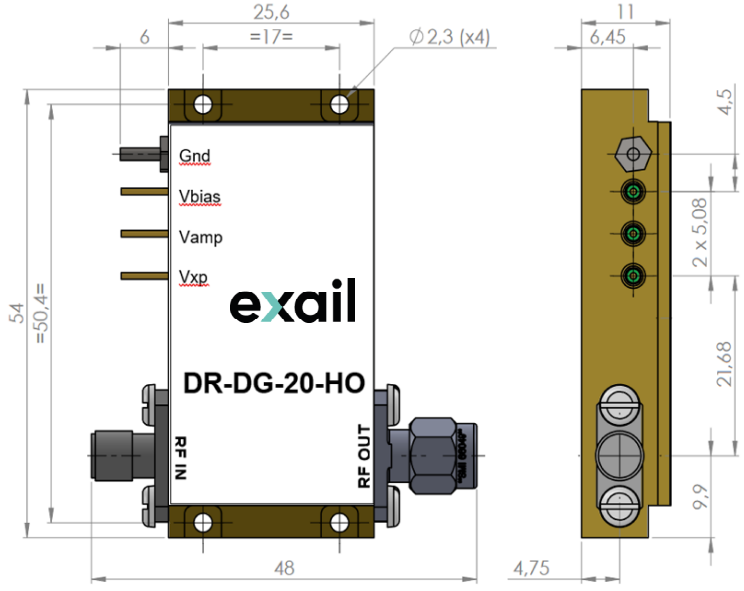



The heat-sinking of the module is necessary. It's user responsability to use an adequate heat-sink. Refer to page 6 for Exail recommended heat-sink.

Port	Function	Unit
IN	RF In	Female K connector
OUT	RF Out	Male K connector
V_{bias}	Power supply voltage	Set a typical operating specification
V_{amp}	Output voltage amplitude adjustment	Adjust for gain control tuning
V_{amp}	Output voltage cross point adjustment	Adjust for cross point control tuning

Mechanical Diagram and Pinout with HS-HO1 Heat-sink

All measurements in mm

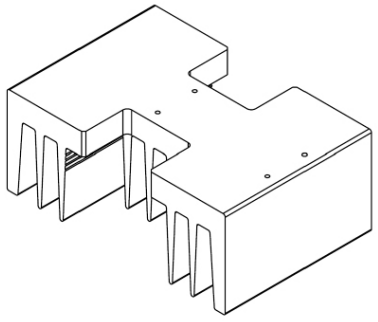

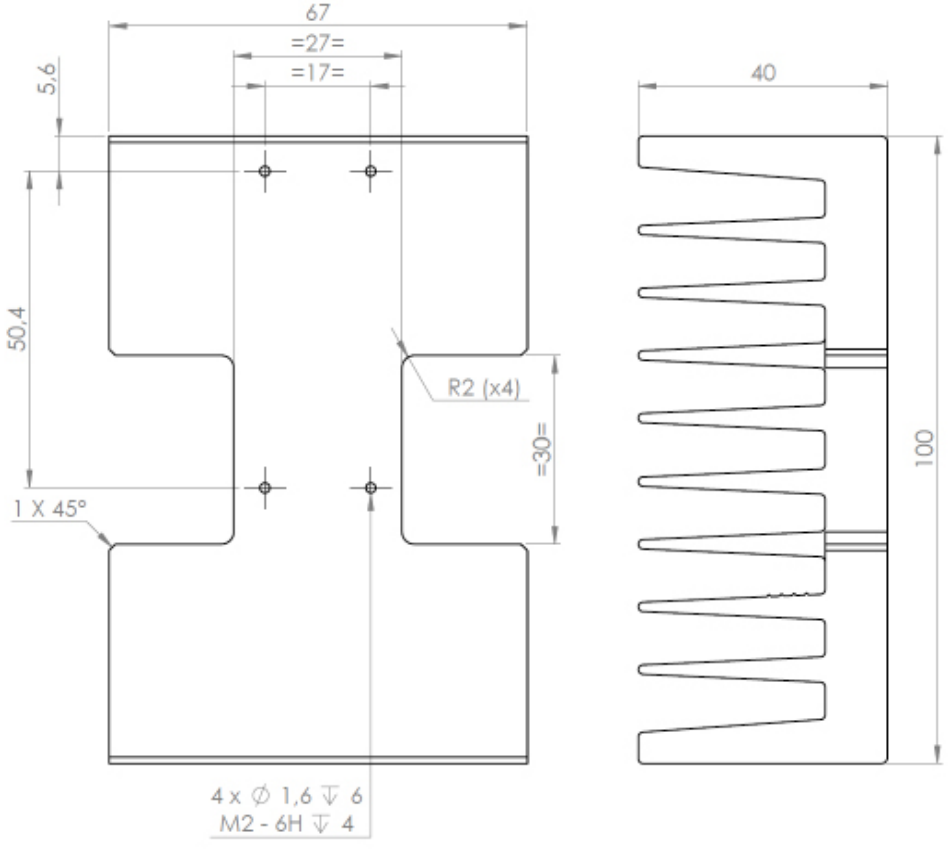

About us

Sales: contact@cybel-llc.com | Web: www.cybel-llc.com | 62 Highland Ave., Bethlehem, PA 18017, USA | Tel: +1 (610) 691-7012